



Item No. \_\_\_\_\_

## BT7280

### Soft Serve Machine



The **BT7280** is the perfect, customer facing, countertop machine. Created for use in convenience stores and restaurants, this machine has the same capacity as its BH7480 counterpart, but has a smaller footprint. This machine is the optimal machine for any non-traditional soft serve concept.

## Features

- Two flavors; twist dispenser system
- Gravity fed and air-cooled
- Digital display diagnostics let operators know when to check on the machine
- Easy to use control panel
- Rapid first time dispensing (7-10 Minutes)
- Smart flow technology allows operators to adjust the dispensing speed of the machine
- Optimized hopper size reduces product waste
- Auto-return handles reduce clean-up time and product waste
- Adjustable temperature settings give operators the ability to offer frozen yogurt, ice cream, gelato, frozen custard, and sorbet


Shown with Standard 1-Piece Graphics Kit



Corporate Headquarters  
4225 34th Street  
Orlando, Florida 32811  
USA

☎ 1.888.350.8091 -Toll Free  
☎ 321.202.2683  
✉ [info@donperamerica.com](mailto:info@donperamerica.com)  
🌐 [www.donperamerica.com](http://www.donperamerica.com)

# BT7280 Soft Serve Machine

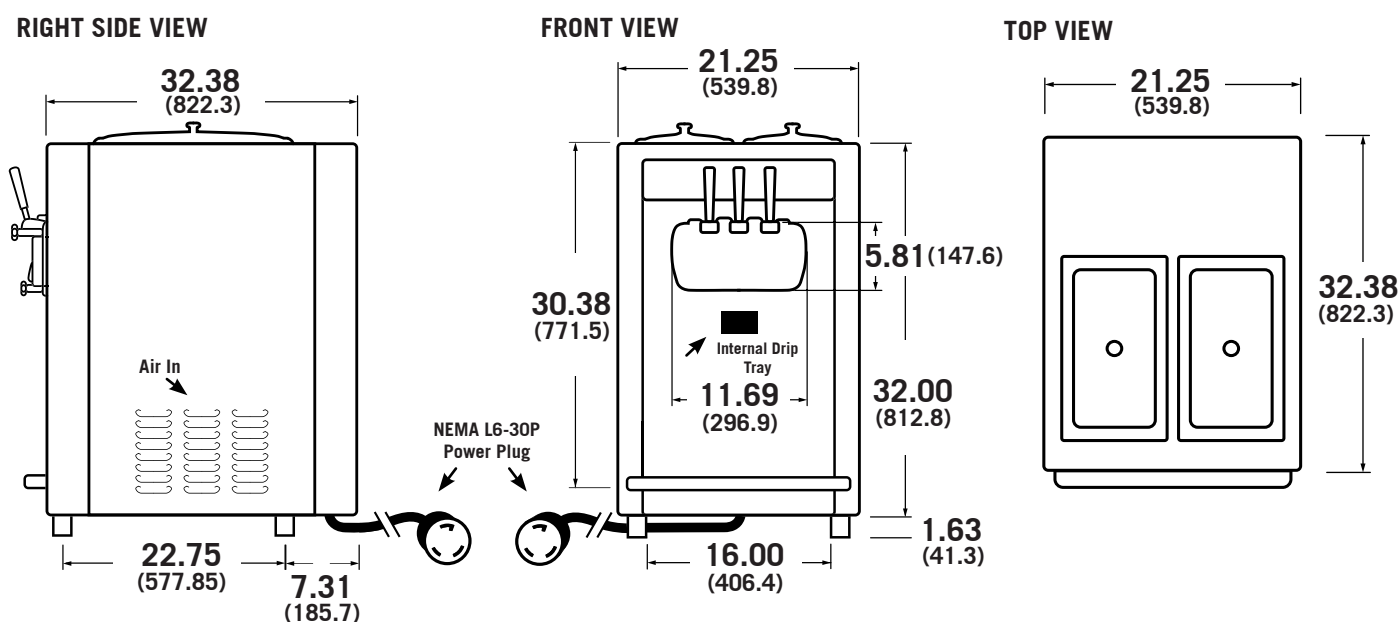

Main measurements in inches. Bracketed measurements in millimeters.

## Capacity

	Qt.	L
Freezing Cylinder	2 x 2.0	2 x 1.9
Refrigerated Hopper	2 x 9.5	2 x 9.0
Production	46-59 / hr	44-56 / hr

## Weights

	lbs	kgs
Net	352.7	160
Gross	385.8	175

## Refrigeration

R404A	900g
R134a	134g
Condenser Type	Air-Cooled

## Electrical

Voltage	208 - 230 v
Rated Input Power	3.8 kW
Hertz	60 Hz
Plug type	NEMA L6-30P
Phase	Single
Breaker Size	30A, Double Pole
Drive Motor	(2)- 1 Hp(750 W)

## Specifications

### Electrical

One dedicated electrical circuit per unit is required.

### Air Cooled

A minimum clearance of 6 inches is required on the left, and right faces of the machine. A minimum clearance is not required for the front or rear faces of the machine.

### Clearance

A minimum door clearance width of 26 inches is required.

### Options

- Custom, 1-Piece Graphics Kit
- Custom, 2-Piece Graphics Kit
- Custom, 3-Piece Graphics Kit

Continuous product development may necessitate specification and/or design changes.